





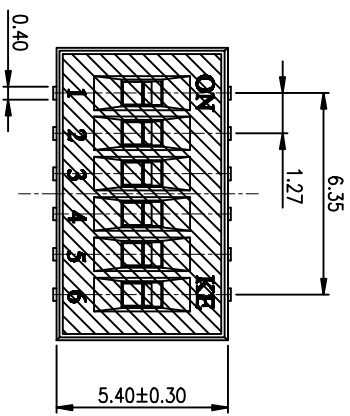


PRODUCT NO.	DSHP06TJGET
RoHS compliant	



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

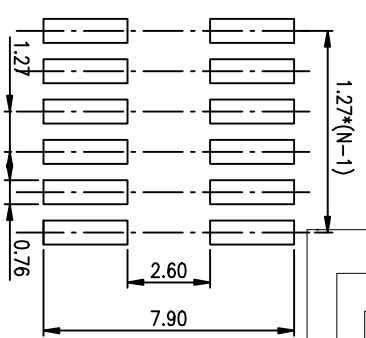

DSHP XX I S G E I
 [包裝方式, T=管裝 R=Reel]
 [電鍍層: P=鍍金 3u" 焊腳部 1.2u" G=鍍鎳 3u" 焊腳部 3u" R=鍍鎳 10u" 焊腳部 10u"
 [G=鍍金 S=內鍍金(接觸部)外鍍鎳(焊腳部)]
 [腳型: S脚 / J脚 / 環脚 / 圓脚 / Z脚]
 [T=低推貼座 S=低推不貼座 L=長推]
 [產品碼: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical life:1000cycles 25mA 24VDC
- 5>.Mechanical Life:3000cycles Operations

2. PLATING:
GOLD FLASH 1u"(min.) SOLDERAL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. PART NUMBER DESCRIPTION :

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0 ± 2'	0	
.00 ± 0.15	.0 ± 1'	0.00 ± 0.10	
.000 ± 0.10	.00 ± 0.5'		
DESIGN	kathy	03/20/12	
DRAWING			
CHECK			
APPRO.			

總督精密電子股份有限公司
 DongGuan Kingtek Industrial Co., Ltd.

FILE NO.	DSHP06TJGET-A
SIZE	A4
UNIT	mm
SCALE	1:1
SHEET	1
REV.	A

A B C D

A B C D

1 2 3 4 5 6