


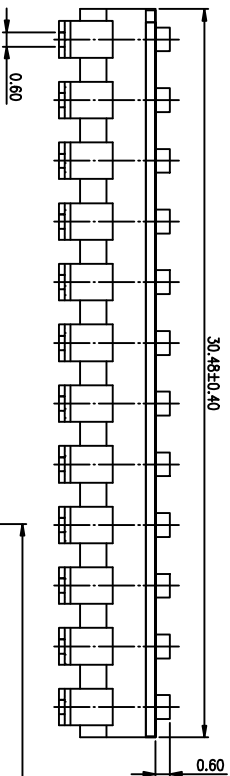

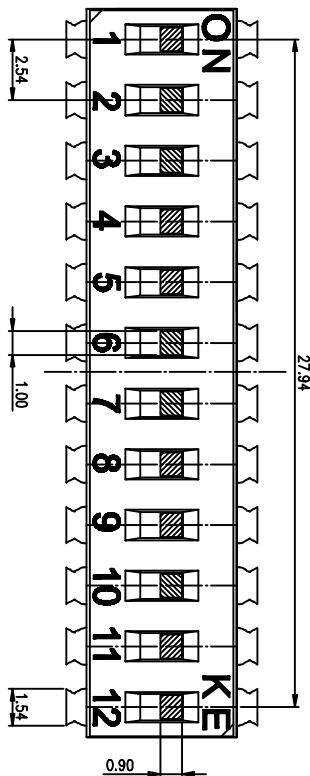


PRODUCT NO.	RoHS compliant
DSIC12LJGET	


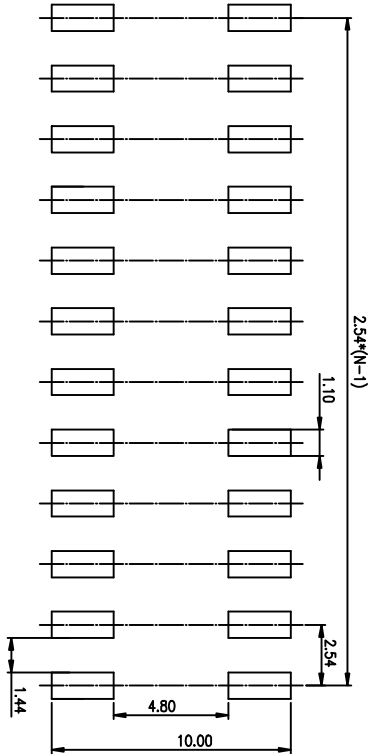


(Construction)



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.
 3. PART NUMBER DESCRIPTION

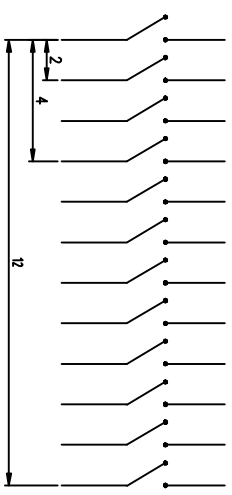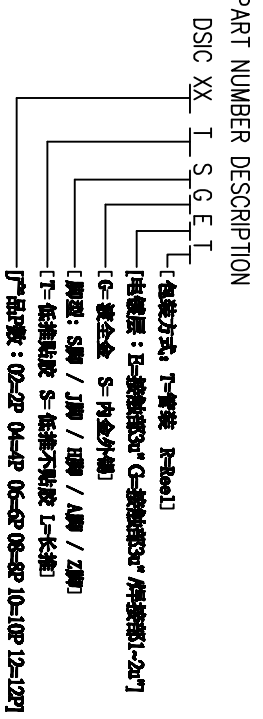

[Schematische]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0. ± 2°		
.00 ± 0.15	.0 ± 1°		
.000± 0.10	.00± 0.5°		

DRAWING CHECK APPRO.		DESIGN kathy		2012/04/12	
PRODUCT FAMILY DSIC SERIES		PRAT NO.		DSIC12LJGET	
BY DSIC SERIES PITCH 2.54mm		TITLE			
DONGGUAN KINGKEK ELECTRONIC CO., LTD.		FILE NO.		DSIC12LJGET-A	
A4		UNIT SCALE		Z : 1	
		SHEET		1 OF 1	
		REV.		A	