
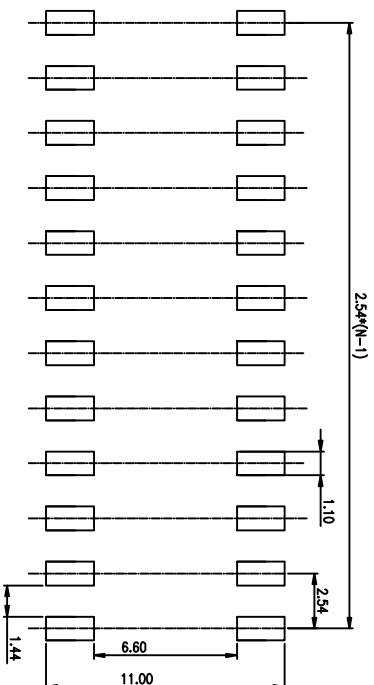
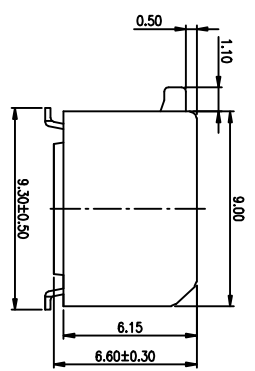




PRODUCT NO.	DSPV12LSGET
RoHS compliant	

NOTES :

- 1.>Specification:
  - 1>.Operating force:1000gf Max
  - 2>.Operating Temperature: -40° to+85°
  - 3>.Storage Temperature: -40° to+85°
  - 4>.Mechanical Life: 3000cycles minimum
2. PLATING:  
GOLD FLASH 1u"(min.) SOLDER TAIL,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. CONTACT RATING:  
1.SWITCHING: 25mA at 24ADC  
2.NON-SWITCHING: 100mA at 50VDC  
WITH 50u" NICKEL UNDERPLATINGOVERALL.
4. PART NUMBER DESCRIPTION :

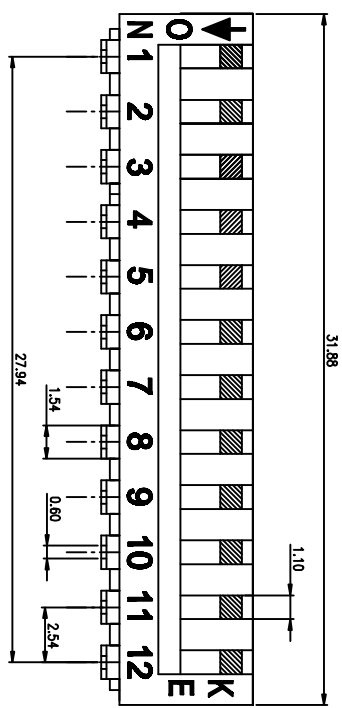

RECOMMENDED PCB LAYOUT (TOP VIEW)

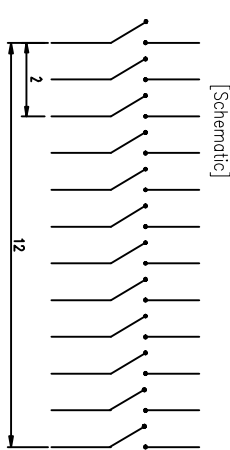

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY
LINER 0 ± 0.25	ANGLES 0 ± 2'
0.00 ± 0.15	.0 ± 1'
.000 ± 0.10	.00 ± 0.5'
DESIGN kathy	2013/01/12
DRAWING	
CHECK	
APPRO.	

东莞市 Kingtek 电子有限公司 Dongguan Kingtek Industrial Co., Ltd.	
TITLE	
BY DSPV SERIES PITCH 2.54mm	
PRODUCT FAMILY DSPV SERIES	
PRAT NO. DSPV12LSGET	
FILE NO. DSPV12LSGET-A	
SIZE UNIT SCALE SHEET REV.	
A4 mm Z : 1 TOF 1 A	

1 2 3 4 5 6